

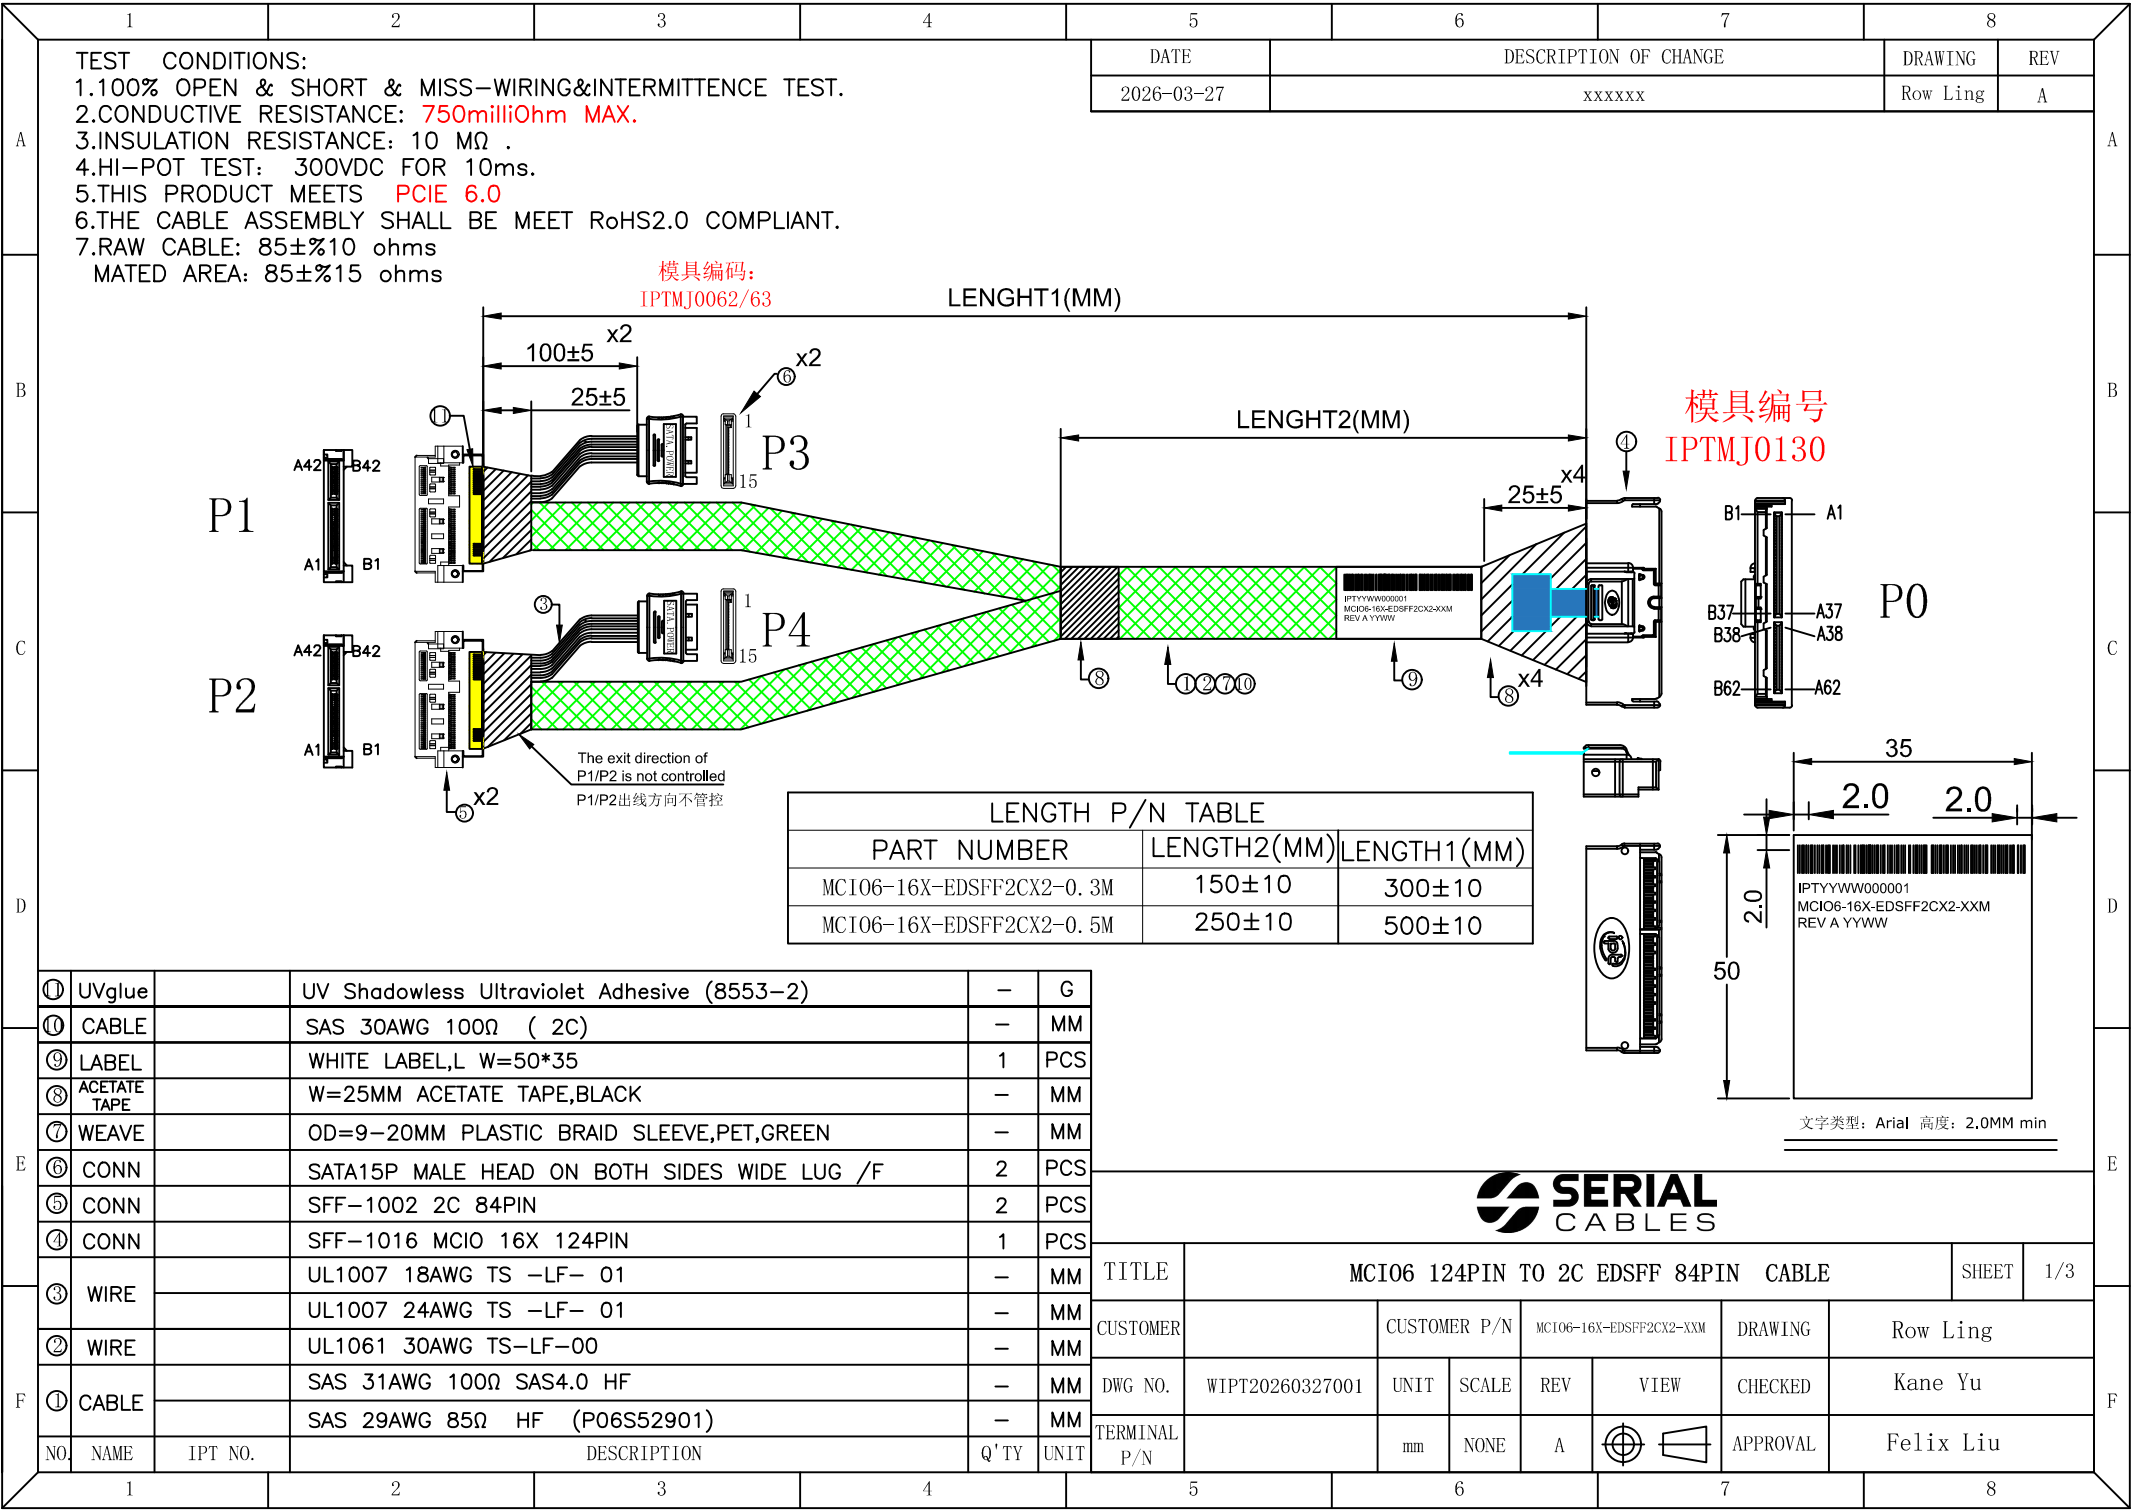


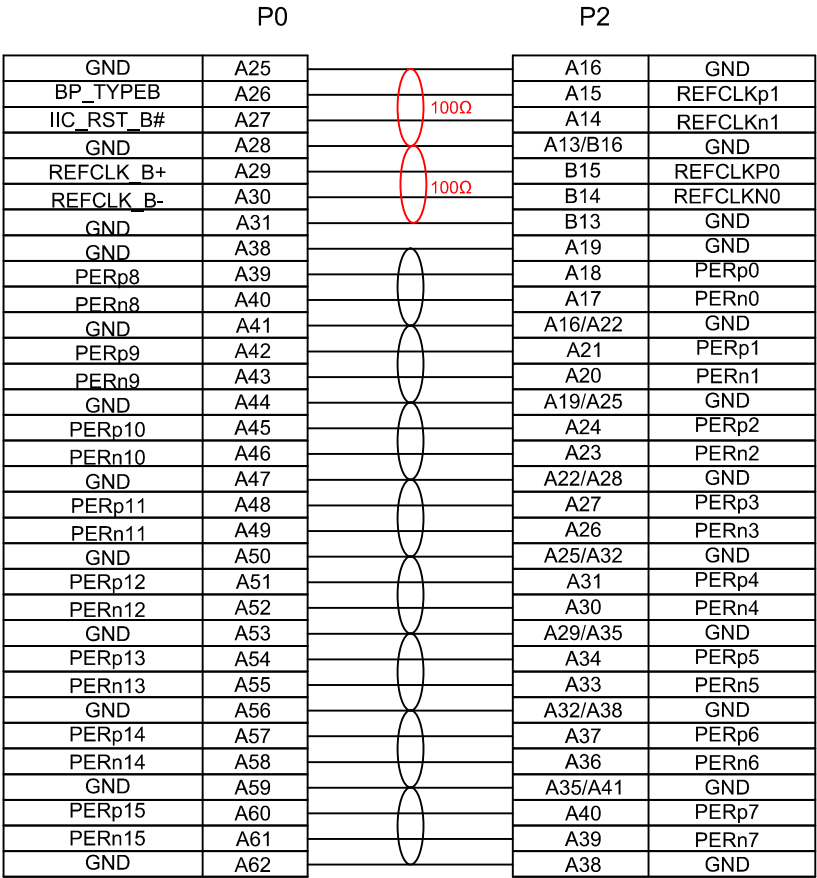


1		2		3		4		5		6		7		8			
								DATE		DESCRIPTION OF CHANGE				DRAWING		REV	
										SEE PAGE ONE				Row Ling			
wiring diagram																	
P0				P1				P0				P2					
GND		A1		A19		GND		GND		A25		A16		GND			
PERp0		A2		A18		PERp0		BP_TYPEB		A26		A15		REFCLKp1			
PERn0		A3		A17		PERn0		IIC_RST_B#		A27		A14		REFCLKn1			
GND		A4		A16/A22		GND		GND		A28		A13/B16		GND			
PERp1		A5		A21		PERp1		REFCLK_B+		A29		B15		REFCLKP0			
PERn1		A6		A20		PERn1		REFCLK_B-		A30		B14		REFCLKN0			
GND		A7		A19/A16		GND		GND		A31		B13		GND			
BP_TYPE_A		A8		A15		REFCLKp1		GND		A38		A19		GND			
IIC_RST#_A		A9		A14		REFCLKn1		PERp8		A39		A18		PERp0			
GND		A10		A13/B16		GND		PERn8		A40		A17		PERn0			
REFCLK_A+		A11		B15		REFCLKP0		GND		A41		A16/A22		GND			
REFCLK_A-		A12		B14		REFCLKN0		PERp9		A42		A21		PERp1			
GND		A13		B13/A25		GND		PERn9		A43		A20		PERn1			
PERp2		A14		A24		PERp2		GND		A44		A19/A25		GND			
PERn2		A15		A23		PERn2		PERp10		A45		A24		PERp2			
GND		A16		A22/A28		GND		PERn10		A46		A23		PERn2			
PERp3		A17		A27		PERp3		GND		A47		A22/A28		GND			
PERn3		A18		A26		PERn3		PERp11		A48		A27		PERp3			
GND		A19		A25/A32		GND		PERn11		A49		A26		PERn3			
PERp4		A20		A31		PERp4		GND		A50		A25/A32		GND			
PERn4		A21		A30		PERn4		PERp12		A51		A31		PERp4			
GND		A22		A29/A35		GND		PERn12		A52		A30		PERn4			
PERp5		A23		A34		PERp5		GND		A53		A29/A35		GND			
PERn5		A24		A33		PERn5		PERp13		A54		A34		PERp5			
GND		A25		A32		GND		PERn13		A55		A33		PERn5			
GND		A31		A38		GND		GND		A56		A32/A38		GND			
PERp6		A32		A37		PERp6		PERp14		A57		A37		PERp6			
PERn6		A33		A36		PERn6		PERn14		A58		A36		PERn6			
GND		A34		A35/A41		GND		GND		A59		A35/A41		GND			
PERp7		A35		A40		PERp7		PERp15		A60		A40		PERp7			
PERn7		A36		A39		PERn7		PERn15		A61		A39		PERn7			
GND		A37		A38		GND		GND		A62		A38		GND			
P3/P4				P1/P2													
1,2,3		24AWG 橙		B11		3.3V											
4,5,6		18AWG 黑		A1,A2,A3		GND											
10,11,12		18AWG 黑		A4,A5,A6		GND											
13,14,15		18AWG 黄		B1--B6		12V											
WIRE DIAGRAM																	
SERIAL CABLES																	
TITLE		MC106 124PIN TO 2C EDSFF 84PIN CABLE										SHEET		2/3			
CUSTOMER				CUSTOMER P/N		MC106-16X-EDSFF2CX2-XXM				DRAWING		Row Ling					
DWG NO.		WIPT20260327001		UNIT		SCALE		REV		VIEW		CHECKED		Kane Yu			
TERMINAL P/N				mm		NONE		A				APPROVAL		Felix Liu			

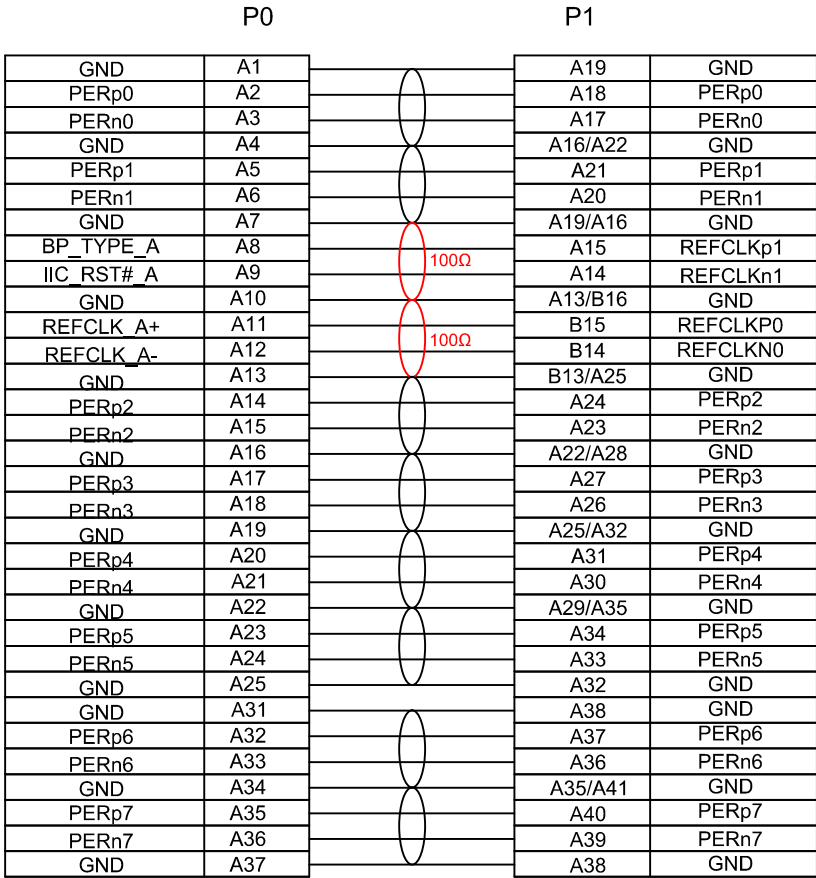

P3/P4		P1/P2	
1,2,3	24AWG 橙	B11	3.3V
4,5,6	18AWG 黑	A1,A2,A3	GND
10,11,12	18AWG 黑	A4,A5,A6	GND
13,14,15	18AWG 黄	B1--B6	12V


WIRE DIAGRAM

							
TITLE	MCI06 124PIN TO 2C EDSFF 84PIN CABLE						
CUSTOMER		CUSTOMER P/N		MCI06-16X-EDSFF2CX2-XXM		DRAWING	Row Ling
DWG NO.	WIPT20260327001	UNIT	SCALE	REV	VIEW	CHECKED	Kane Yu
TERMINAL P/N		mm	NONE	A		APPROVAL	Felix Liu

1		2		3		4		5		6		7		8	
								DATE	DESCRIPTION OF CHANGE				DRAWING	REV	
									SEE PAGE ONE				Row Ling		
A															A
wiring diagram															
</															

P0		P1	
GND	B1	B19	GND
PETp0	B2	B18	PETp0
PETn0	B3	B17	PETn0
GND	B4	B16/B22	GND
PETp1	B5	B21	PETp1
PETn1	B6	B20	PETn1
GND	B7	B19	GND
2W-CLK_A	B8	A7	SMCIk
2W-DATA_A	B9	A8	SMDat
GND	B10		
PERST#_A	B11	B10	ePerst0#
CPRSNT#_A	B12	A12	PRCNT0#
GND	B13	B25	GND
PETp2	B14	B24	PETp2
PETn2	B15	B23	PETn2
GND	B16	B22/B28	GND
PETp3	B17	B27	PETp3
PETn3	B18	B26	PETn3
GND	B19	B25/B32	GND
PETp4	B20	B31	PETp4
PETn4	B21	B30	PETn4
GND	B22	B29/B35	GND
PETp5	B23	B34	PETp5
PETn5	B24	B33	PETn5
GND	B25	B32	GND
GND	B28		
GND	B31	B38	GND
PETp6	B32	B37	PETp6
PETn6	B33	B36	PETn6
GND	B34	B35/B41	GND
PETp7	B35	B40	PETp7
PETn7	B36	B39	PETn7
GND	B37	B38	GND

P0		P2	
2W-CLKB	B26	A7	SMCIk
2W-DATAB	B27	A8	SMDat
PERST#_B	B29	B10	ePerst0#
CPRSNT#_B	B30	A12	PRCNT0#
GND	B38	B19	GND
PETp8	B39	B18	PETp0
PETn8	B40	B17	PETn0
GND	B41	B16/B22	GND
PETp9	B42	B21	PETp1
PETn9	B43	B20	PETn1
GND	B44	B19/B25	GND
PETp10	B45	B24	PETp2
PETn10	B46	B23	PETn2
GND	B47	B22/B28	GND
PETp11	B48	B27	PETp3
PETn11	B49	B26	PETn3
GND	B50	B25/B32	GND
PETp12	B51	B31	PETp4
PETn12	B52	B30	PETn4
GND	B53	B29/B35	GND
PETp13	B54	B34	PETp5
PETn13	B55	B33	PETn5
GND	B56	B32	GND
PETp14	B57	B37	PETp6
PETn14	B58	B36	PETn6
GND	B59	B35/B41	GND
PETp15	B60	B40	PETp7
PETn15	B61	B39	PETn7
GND	B62	B38	GND

							
TITLE	MCI06 124PIN TO 2C EDSFF 84PIN CABLE						
CUSTOMER		CUSTOMER P/N		MCI06-16X-EDSFF2CX2-XXM		DRAWING	Row Ling
DWG NO.	WIPT20260327001	UNIT	SCALE	REV	VIEW	CHECKED	Kane Yu
TERMINAL P/N		mm	NONE	A		APPROVAL	Felix Liu