
The marking on this product doesn't contain environmental hazardous materials per directive 2011/65/EU for RoHS compliance.

NOTE:
1. THE CABLE ASSEMBLY SHALL BE MEET RoHS2.0 COMPLIANT.
   该产品通过RoHS2.0认证.
2. THE CABLE ASSEMBLY SHALL MEET BELOW IMPENDANCE REQUIREMENT:
   TERMINATION AREA: 85±15% OHMS, CABLE ABSOLUTE AREA: 85±10% OHMS.
   该产品满足下面阻抗特性：接触区域85±15% 欧姆，线材为85±10% 欧姆.
3. ELECTRICAL AND MECHANICAL PERFORMANCE SHOULD MEET THE SAS4.0 INDUSTRIAL STARDAND.
   电气和机械特性遵循SAS4.0工业标准.

REVISIONS					
ECN NO.	REV.	DESCRIPTIONS	CHECKED	APPROVED	DATE
REV.	AX1	INITIAL RELEASE	KOCHI	DAVID	11/07/2016
	AX2	ADD DESCRIPTION FOR PIN OUT	JUSTIN	KASUN	09/01/2017
	AX3	ADD ZIP BAG	JUSTIN	KASUN	09/07/2017

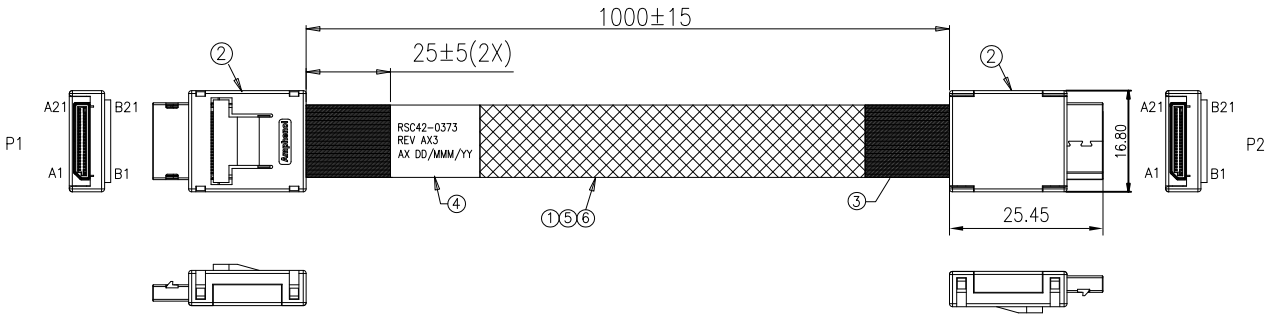

P1		P2	
RESERVED	A1	B1	RESERVED
GROUND	A2	B2	GROUND
PERp0	A3	B3	PETp0
PERn0	A4	B4	PETn0
GROUND	A5	B5	GROUND
PERp1	A6	B6	PETp1
PERn1	A7	B7	PETn1
GROUND	A8	B8	GROUND
BP TYPE	A9	B9	BP TYPE
CWAKE#	A10	B10	CWAKE#
GROUND	A11	B11	GROUND
VSP	A12	B12	VSP
VSP	A13	B13	VSP
GROUND	A14	B14	GROUND
PERp2	A15	B15	PETp2
PERn2	A16	B16	PETn2
GROUND	A17	B17	GROUND
PERp3	A18	B18	PETp3
PERn3	A19	B19	PETn3
GROUND	A20	B20	GROUND
RESERVED	A21	B21	RESERVED
RESERVED	B1	A1	RESERVED
GROUND	B2	A2	GROUND
PETp0	B3	A3	PERp0
PETn0	B4	A4	PERn0
GROUND	B5	A5	GROUND
PETp1	B6	A6	PERp1
PETn1	B7	A7	PERn1
GROUND	B8	A8	GROUND
2-WIRE CLOCK	B9	A9	2-WIRE CLOCK
2-WIRE DATA	B10	A10	2-WIRE DATA
GROUND	B11	A11	GROUND
PERST#	B12	A12	PERST#
CPRSNT#	B13	A13	CPRSNT#
GROUND	B14	A14	GROUND
PETp2	B15	A15	PERp2
PETn2	B16	A16	PERn2
GROUND	B17	A17	GROUND
PETp3	B18	A18	PERp3
PETn3	B19	A19	PERn3
GROUND	B20	A20	GROUND
RESERVED	B21	A21	RESERVED

WIRE TABLE



LABEL DETAIL

ITEM	P/N	DESCRIPTION	QTY
6	H03302320X	WIRE,32AWG,UL3302,7/0.08,HF,VW-1,NO MARKING	A/R
5	HMTBD00501	EXPANDO TUBE:OD=5MM,BLACK,VW-1,HF	A/R
4	HMLSB57262	LABEL:57*26MM,BLANK,WHT,R2,HF	1
3	HMMTP00012	ACETATE TAPE:W=1INCH,HF	A/R
2	OCL42-0003	Minilink,42POS,CONNECTOR, STR WITH ACTIVE LATCH	2
1	HWSS320020	SAS CBL:UL20744,32#2C+2C+A+HM,BLU,85Ω,VW-1,HF,24G	A/R

GENERAL TOLERANCES	
.X:	± 0.5
.XX:	± 0.3
.XXX:	± 0.01
ANGULAR:	± 1°

This drawing is the property of Serial Cables and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Serial Cables without its prior consent, and that no right is granted to disclose or use any information in this drawing.

DRAWN:	NATHAN CAO	DATE: 09/07/2017
CHECKED:	JUSTIN OU	DATE: 09/07/2017
APPROVED:	KASUN LI	DATE: 09/07/2017


TITLE:
SC P/N:RSC42-0373
OCULINK 4X STR TO STR

DWG. No.: RML42-0373

SCALE: NONE | SHEET 1 OF 2
UNIT: MM | SIZE: A4 | REV.: AX3


The marking on this product doesn't contain environmental hazardous materials per directive 2011/65/EU for RoHS compliance.

REVISIONS					
ECN NO.	REV.	DESCRIPTIONS	CHECKED	APPROVED	DATE
REL.					

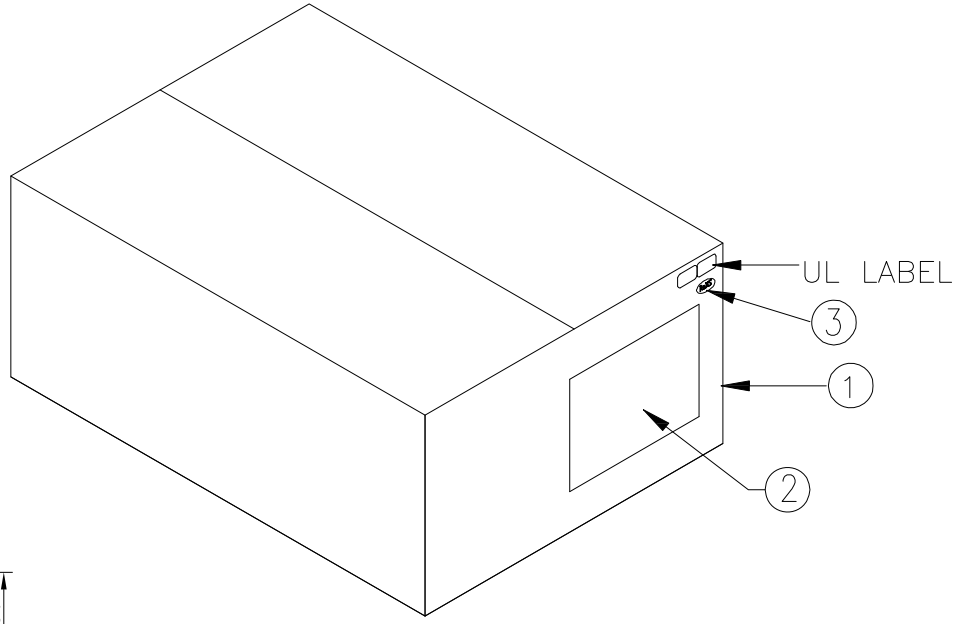


LABEL 2


PN: RSC42-0373/RML42-0373



LABEL 3



LABEL 4

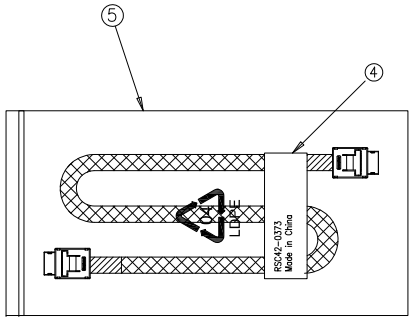

ITEM	PART NUMBER	DESCRIPTION	Q'TY
5	RMBZIP0046	ZIP BAG:280*100MM	1
4	RMLSB50302	LABEL4:50*30MM,WHT	1
3	RMLSW30201	RoHS LABEL:30*20MM, LABEL5 INFO	1
2	RMLSB00401	LABEL3:100*40MM,WHT,BLANK,R2	1
1	RMBCTN0019	CARTON:590*240*200MM E TYPE	1

GENERAL TOLERANCES	
.X:	± 0.5
.XX:	± 0.3
.XXX:	± 0.01
ANGULAR:	± 1°

This drawing is the property of Serial Cables and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Serial Cables without its prior consent, and that no right is granted to disclose or use any information in this drawing.

DRAWN:	NATHAN CAO	DATE: 09/07/2017
CHECKED:	JUSTIN OU	DATE: 09/07/2017
APPROVED:	KASUN LI	DATE: 09/07/2017

TITLE:
SC P/N:RSC42-0373
OCULINK 4X STR TO STR

DWG. No.: RML42-0373

SCALE: NONE | SHEET 2 OF 2
UNIT: MM | SIZE: A4 | REV.: AX3