

DATE	DESCRIPTION OF CHANGE	REV
2020-08-19	Change version, from a board to B board, content unchanged	B

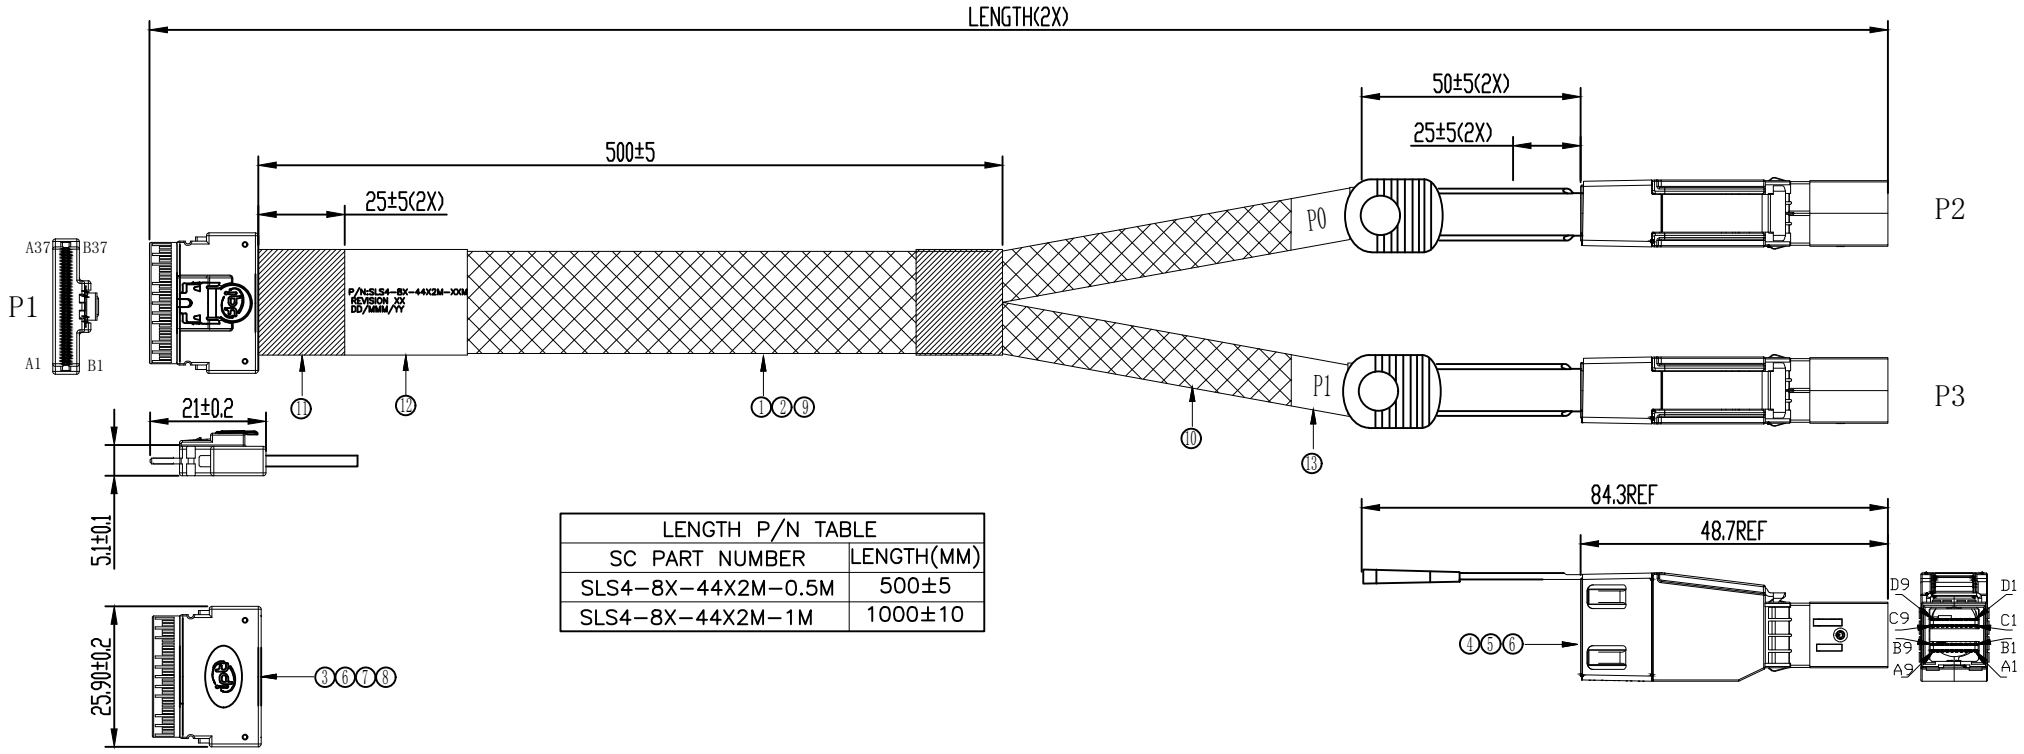

LENGTH P/N TABLE	
SC PART NUMBER	LENGTH(MM)
SLS4-8X-44X2M-0.5M	500±5
SLS4-8X-44X2M-1M	1000±10

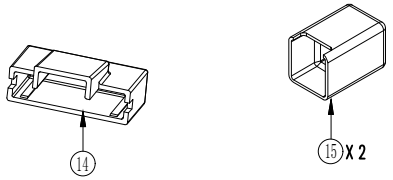

NO.	NAME	IPT NO.	DESCRIPTION	Q'TY	UNIT
⑬	LABEL		WHITE LABEL,L W=10*30 P0 or P1	2	PCS
⑫	LABEL		WHITE LABEL,L W=40*30	1	PCS
⑪	ACETATE TAPE		W=25MM ACETATE TAPE,BLACK	–	MM
⑩	WEAVE		W=12MM PLASTIC BRAID SLEEVE,PET,BLACK	–	MM
⑨	WEAVE		W=20MM PLASTIC BRAID SLEEVE,PET,BLACK	–	MM
⑧	LATCH		SFF-8654 LATCH,SUS301 1/2H	1	PCS
⑦	Outer Shell		Black core material PBT	–	G
⑥	INNER MOLD		Internal Mould material	–	G
⑤	CONNECTOR		SFF-8644 Connector, zinc alloy housing	2	SET
④	PCB		SAS HD PCB (A1-A9,B1-B9,C1-C9,D1-D9)	2	SET
③	PCB		SFF-8654 8i STR PCB, Au 30" Min	1	PCS
②	CABLE		UL 1571 30AWG RED	–	MM
①	CABLE		SAS CABLE 30AWG 92Ω	–	MM

serial CABLES

TITLE	CABLE ,SFF-8654 X8 TO 2X SFF-8644 X4						SHEET	1/2
CUSTOMER		CUSTOMER P/N		SLS4-8X-44X2M-xxM		DRAWING	lupeng	
DWG NO.	IPT20200822001	UNIT	SCALE	REV	VIEW		CHECKED	lupeng
IPT P/N	3.0.C548444001	mm	NONE	B			APPROVAL	


DATE	DESCRIPTION OF CHANGE	REV
2020-08-19	Change version, from a board to B board, content unchanged	B

WIRING TABLE

P1		P2	
GND	B19	A9	GND
Tx3−	B18	A8	Rx3−
Tx3+	B17	A7	Rx3+
GND	B16	B9/A6	GND
Tx2−	B15	B8	Rx2−
Tx2+	B14	B7	Rx2+
GND	B13	B6	GND
SB	B12	D1	SB
SB	B11	C1	SB
	B10		
SB	B9	B1	SB
SB	B8	A1	SB
GND	B7	A6	GND
Tx1−	B6	A5	Rx1−
Tx1+	B5	A4	Rx1+
GND	B4	B6/A3	GND
Tx0−	B3	B5	Rx0−
Tx0+	B2	B4	Rx0+
GND	B1	B3	GND
GND	A19	C9	GND
Rx3−	A18	C8	Tx3−
Rx3+	A17	C7	Tx3+
GND	A16	D9/C6	GND
Rx2−	A15	D8	Tx2−
Rx2+	A14	D7	Tx2+
GND	A13	D6	GND
SB	A12	D2	SB
SB	A11	C2	SB
	A10		
SB	A9	B2	SB
SB	A8	A2	SB
GND	A7	C6	GND
Rx1−	A6	C5	Tx1−
Rx1+	A5	C4	Tx1+
GND	A4	D6/C3	GND
Rx0−	A3	D5	Tx0−
Rx0+	A2	D4	Tx0+
GND	A1	D3	GND

P1		P3	
GND	B37	A9	GND
Tx7−	B36	A8	Rx3−
Tx7+	B35	A7	Rx3+
GND	B34	B9/A6	GND
Tx6−	B33	B8	Rx2−
Tx6+	B32	B7	Rx2+
GND	B31	B6	GND
SB	B30	D1	SB
SB	B29	C1	SB
	B28		
SB	B27	B1	SB
SB	B26	A1	SB
GND	B25	A6	GND
Tx5−	B24	A5	Rx1−
Tx5+	B23	A4	Rx1+
GND	B22	B6/A3	GND
Tx4−	B21	B5	Rx0−
Tx4+	B20	B4	Rx0+
GND	B19	B3	GND
GND	A37	C9	GND
Rx7−	A36	C8	Tx3−
Rx7+	A35	C7	Tx3+
GND	A34	D9/C6	GND
Rx6−	A33	D8	Tx2−
Rx6+	A32	D7	Tx2+
GND	A31	D6	GND
SB	A30	D2	SB
SB	A29	C2	SB
	A28		
SB	A27	B2	SB
SB	A26	A2	SB
GND	A25	C6	GND
Rx5−	A24	C5	Tx1−
Rx5+	A23	C4	Tx1+
GND	A22	D6/C3	GND
Rx4−	A21	D5	Tx0−
Rx4+	A20	D4	Tx0+
GND	A19	D3	GND

LABEL INFORMATION

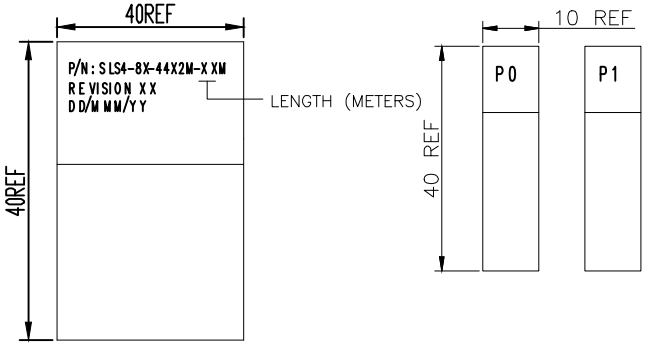

FONT: ARIAL
HEIGHT: 2.0mm Min

HIGH-SPEED SERIAL DIFFERENTIAL PAIRS
SIGNAL RETURN
SIDEBAND SIGNAL

TEST CONDITIONS:
1. 100% OPEN & SHORT & MISS-WIRING & INTERMITTENCE TEST.
2. CONDUCTIVE RESISTANCE: 3Ω MAX.
3. INSULATION RESISTANCE: 10 MΩ
4. HI-POT TEST: 300VDC FOR 10ms.
5. THIS PRODUCT MEETS SAS 4.0 & PCIE GEN 4.

RoHS Compliant

NOTES:
1. END TO END RESISTANCE OF INDICATED CONNECTION SHALL BE 750 MILLIOHM MAX.
2. CONNECT SHIELD OF DIFFERENTIAL PAIR TO INDICATED PIN PAD AND SHORT TO SECOND INDICATED PIN PAD.

serial CABLES


TITLE	CABLE ,SFF-8654 X8 TO 2X SFF-8644 X4					SHEET	2/2
CUSTOMER		CUSTOMER P/N		SLS4-8X-44X2M-xxM		DRAWING	lupeng
DWG NO.	IPT20200822001	UNIT	SCALE	REV	VIEW	CHECKED	lupeng
IPT P/N	3.0.C548444001	mm	NONE	B		APPROVAL	

DATE	DESCRIPTION OF CHANGE	REV
2020-09-12	XXXXXXXX	A

BAGGING METHOD 1:

★ PACKAGING BELOW 0.5M


1PE BAGS PER 1PCS

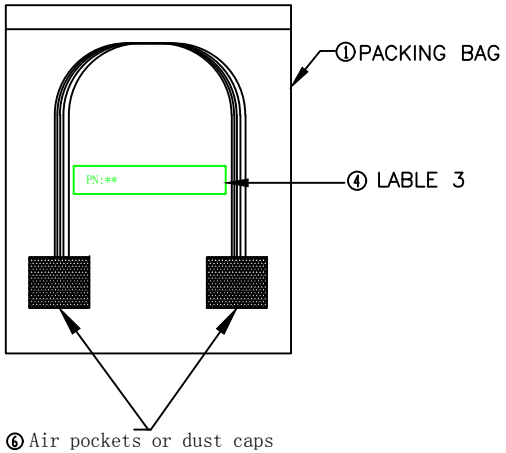



BAGGING METHOD 2:

★ PACKAGING ABOVE 0.5M


1PE BAGS PER 1PCS

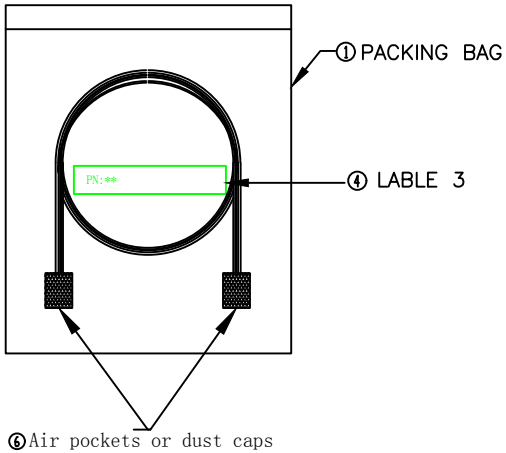

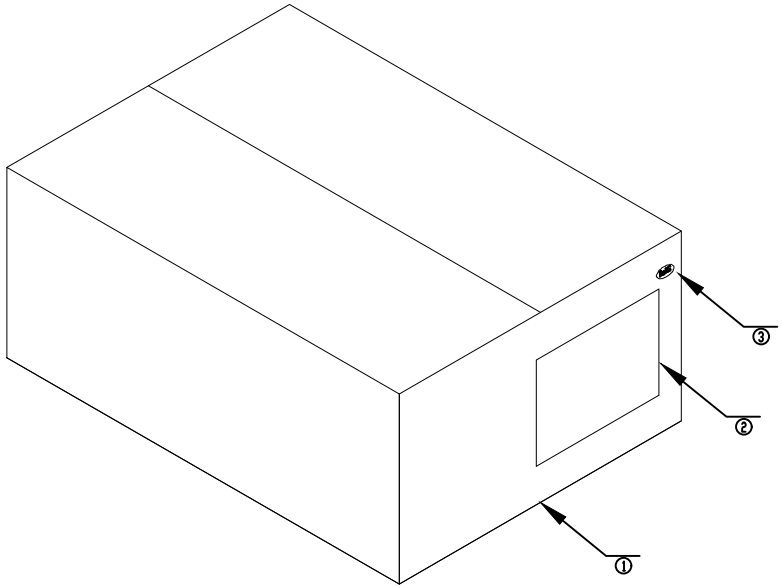


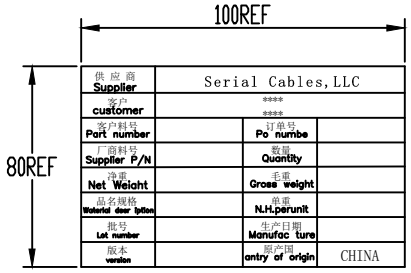

② LABLE 1

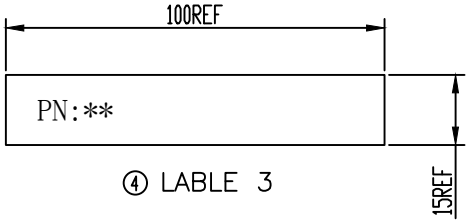

④ LABLE 3



③ LABLE 2

NO.	NAME	IPT NO.	DESCRIPTION	Q'TY	Q'TY
⑥	Protective Cover		Air pockets or dust caps	–	PCS
⑤	PACKING BAG		PACKING BAG 350*250MM	1	PCS
④	LABLE		LABLE:100*15MM (PN:***)	1	PCS
③	LABLE		LABLE:30*20MM Printed Rohs	1	PCS
②	LABLE		LABLE:100*80MM	1	PCS
①	Outer case		460*300*230MM Blank outer box	–	PCS

This drawing is the property of Serial Cables and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Serial Cables without its prior consent,and that no right is granted to disclose or use any information in this drawing

serial CABLES

TITLE	Packaging specification for SAS (general)					SHEET	1/1
CUSTOMER		CUSTOMER P/N				DRAWING	lupeng
DWG NO.	IPT202009012001	UNIT	SCALE	REV	VIEW	CHECKED	lupeng
IPT P/N		mm	NONE	A		APPROVAL	